

Analyse des Données

Master 2 IMAFA



Andrea G. B. Tettamanzi

Université Nice Sophia Antipolis

UFR Sciences - Département Informatique

andrea.tettamanzi@unice.fr


CM - Séance 2 – Partie A

Pré-traitement (suite)


Data Compression

- String compression
 - There are extensive theories and well-tuned algorithms
 - Typically lossless
 - But only limited manipulation is possible without expansion
- Audio/video compression
 - Typically lossy compression, with progressive refinement
 - Sometimes small fragments of signal can be reconstructed without reconstructing the whole
- Time sequence is not audio
 - Typically short and vary slowly with time

Data Compression

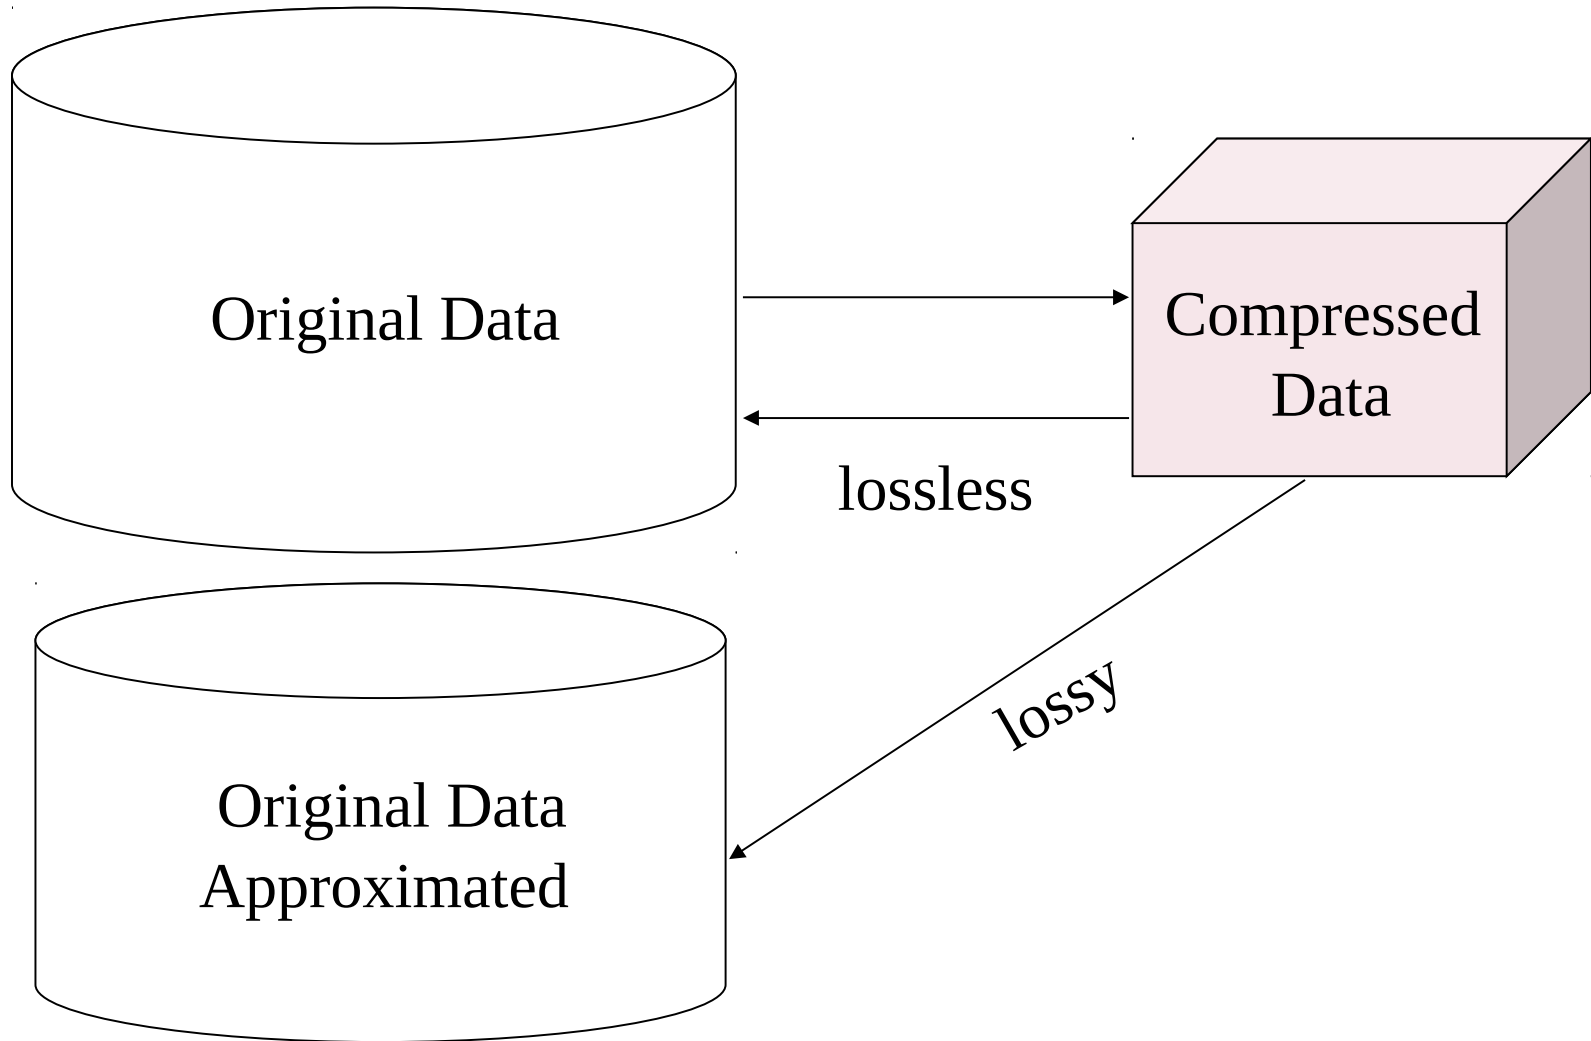


Dimensionality Reduction: Wavelet Transformation

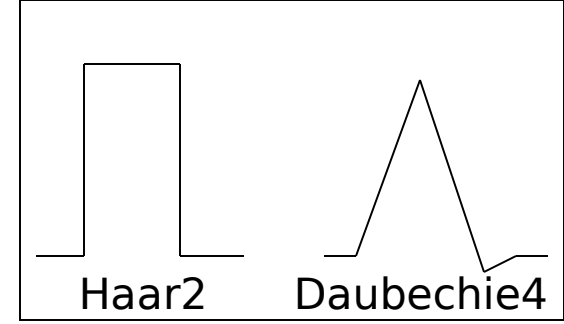

- Discrete wavelet transform (DWT): linear signal processing, multi-resolution analysis
- Compressed approximation: store only a small fraction of the strongest of the wavelet coefficients
- Similar to discrete Fourier transform (DFT), but better lossy compression, localized in space
- Method:
 - Length, L , must be an integer power of 2 (padding with 0's, when necessary)
 - Each transform has 2 functions: smoothing, difference
 - Applies to pairs of data, resulting in two set of data of length $L/2$
 - Applies two functions recursively, until reaches the desired length

Principal Component Analysis

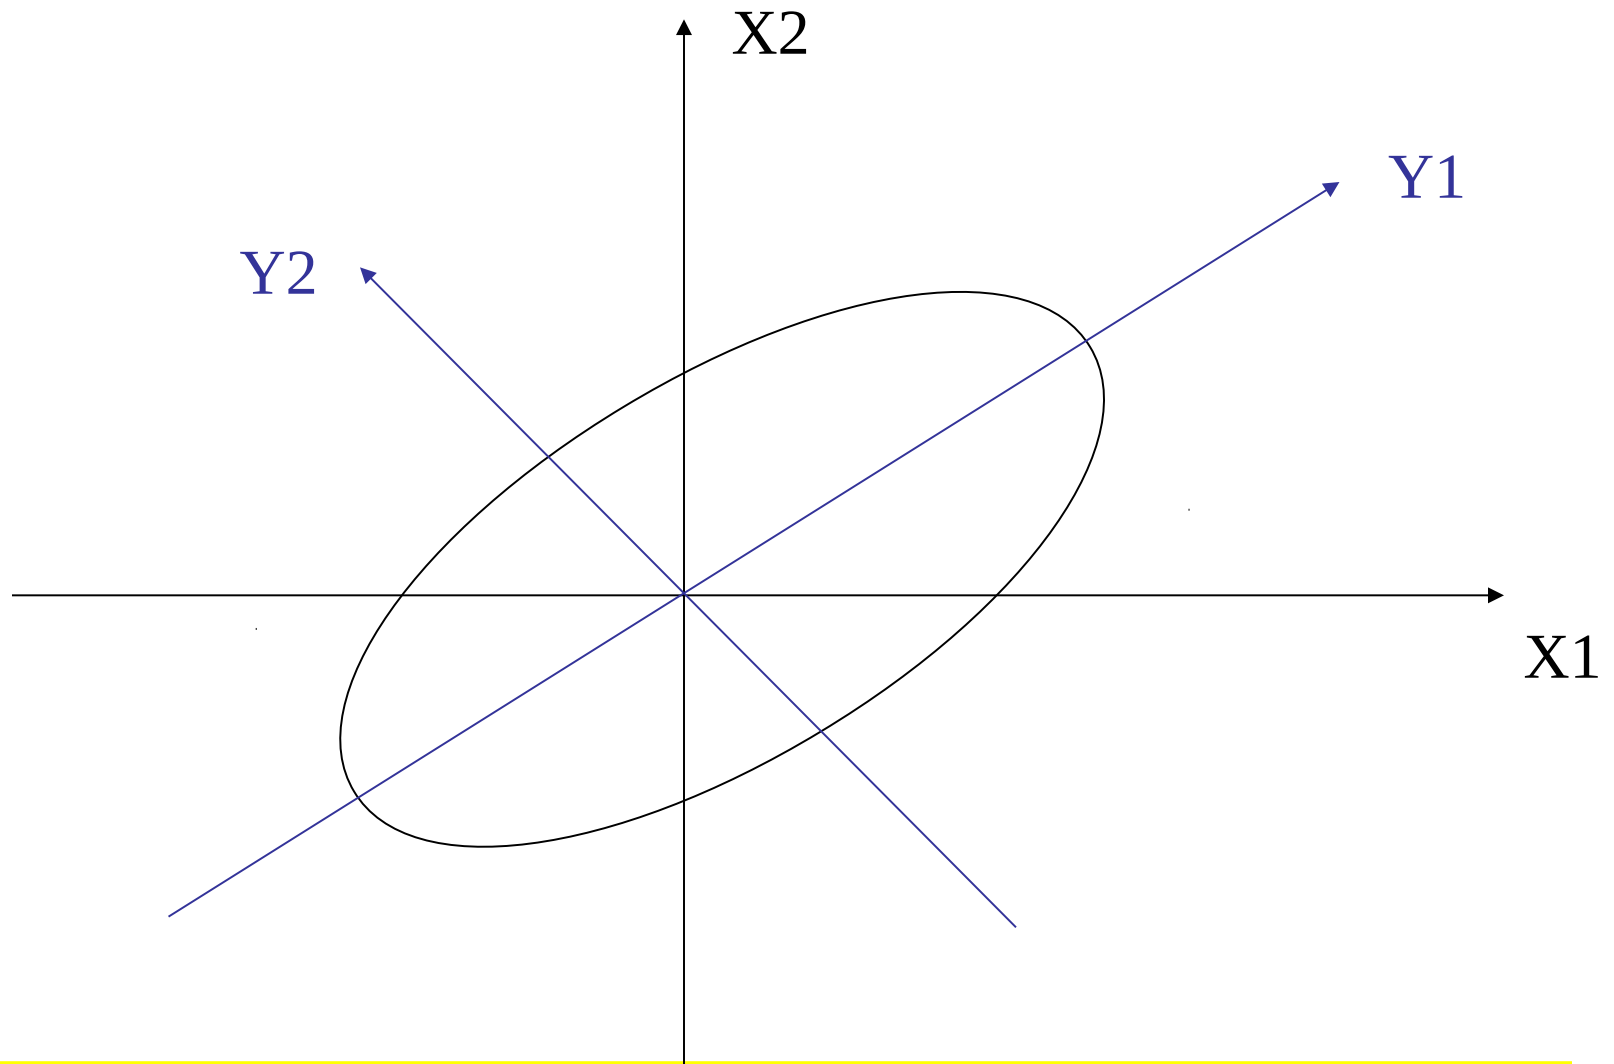

Numerosity Reduction

- Reduce data volume by choosing alternative, smaller forms of data representation
- Parametric methods
 - Assume the data fits some model, estimate model parameters, store only the parameters, and discard the data (except possible outliers)
 - Example: Log-linear models—obtain value at a point in m -D space as the product on appropriate marginal subspaces
- Non-parametric methods
 - Do not assume models
 - Major families: histograms, clustering, sampling

Data Reduction Method (1): Regression and Log-Linear Models


- Linear regression: Data are modeled to fit a straight line
 - Often uses the least-square method to fit the line
- Multiple regression: allows a response variable Y to be modeled as a linear function of multidimensional feature vector
- Log-linear model: approximates discrete multidimensional probability distributions

Regression Analysis and Log-Linear Models

- Linear regression: $Y = w X + b$
 - Two regression coefficients, w and b , specify the line and are to be estimated by using the data at hand
 - Using the least squares criterion to the known values of $Y_1, Y_2, \dots, X_1, X_2, \dots$
- Multiple regression: $Y = b_0 + b_1 X_1 + b_2 X_2$.
 - Many nonlinear functions can be transformed into the above
- Log-linear models:
 - The multi-way table of joint probabilities is approximated by a product of lower-order tables
 - Probability: $p(a, b, c, d) = \alpha_{ab} \beta_{ac} \chi_{ad} \delta_{bcd}$

Data Reduction Method (2): Histograms

- Divide data into buckets and store average (sum) for each bucket
- Partitioning rules:
 - Equal-width: equal bucket range
 - Equal-frequency (or equal-depth)
 - V-optimal: with the least *histogram variance* (weighted sum of the original values that each bucket represents)
 - MaxDiff: set bucket boundary between each pair for pairs have the $\beta-1$ largest differences

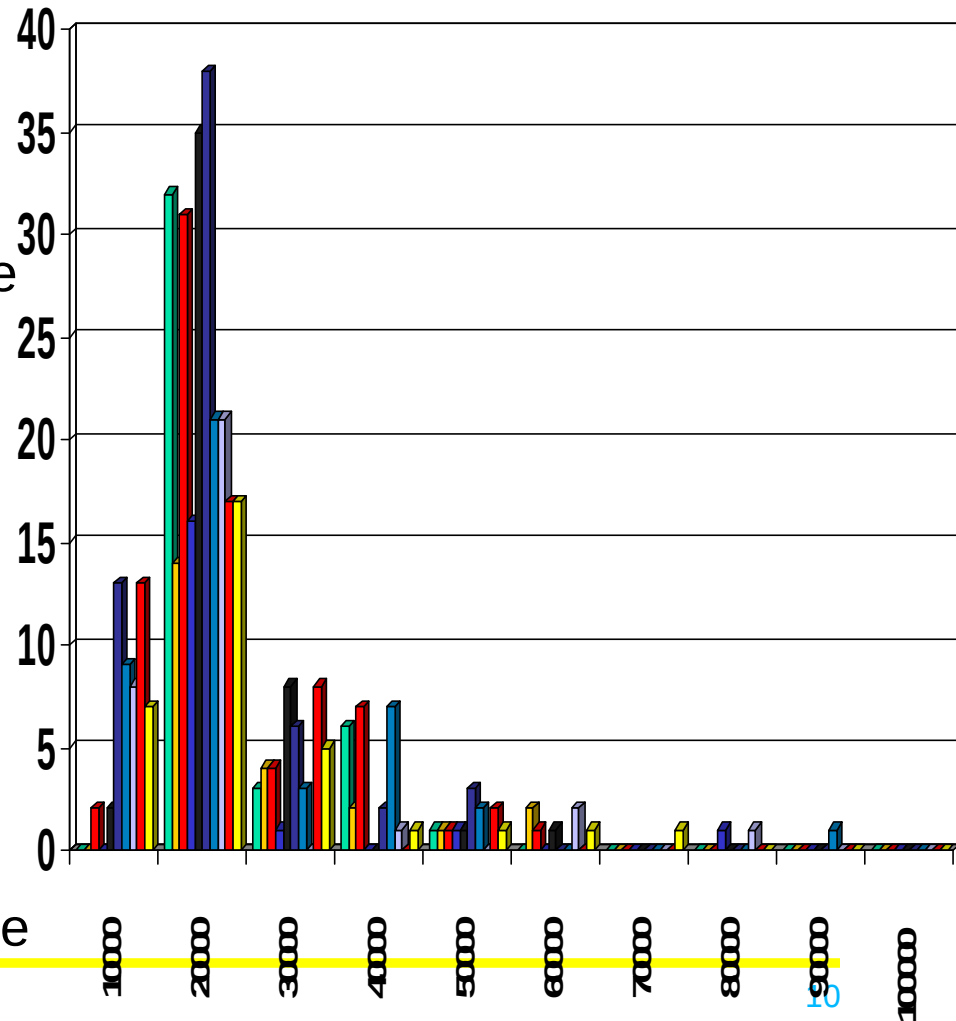


Data Reduction Method (3): Clustering

- Partition data set into clusters based on similarity, and store cluster representation (e.g., centroid and diameter) only
- Can be very effective if data is clustered but not if data is “smeared”
- Can have hierarchical clustering and be stored in multi-dimensional index tree structures
- There are many choices of clustering definitions and clustering algorithms
- Cluster analysis will be studied in depth in Chapter 7

Data Reduction Method (4): Sampling

- Sampling: obtaining a small sample s to represent the whole data set N
- Allow a mining algorithm to run in complexity that is potentially sub-linear to the size of the data
- Choose a representative subset of the data
 - Simple random sampling may have very poor performance in the presence of skew
- Develop adaptive sampling methods
 - Stratified sampling:
 - Approximate the percentage of each class (or subpopulation of interest) in the overall database
 - Used in conjunction with skewed data
- Note: Sampling may not reduce database I/Os (page at a time)


Sampling: with or without Replacement

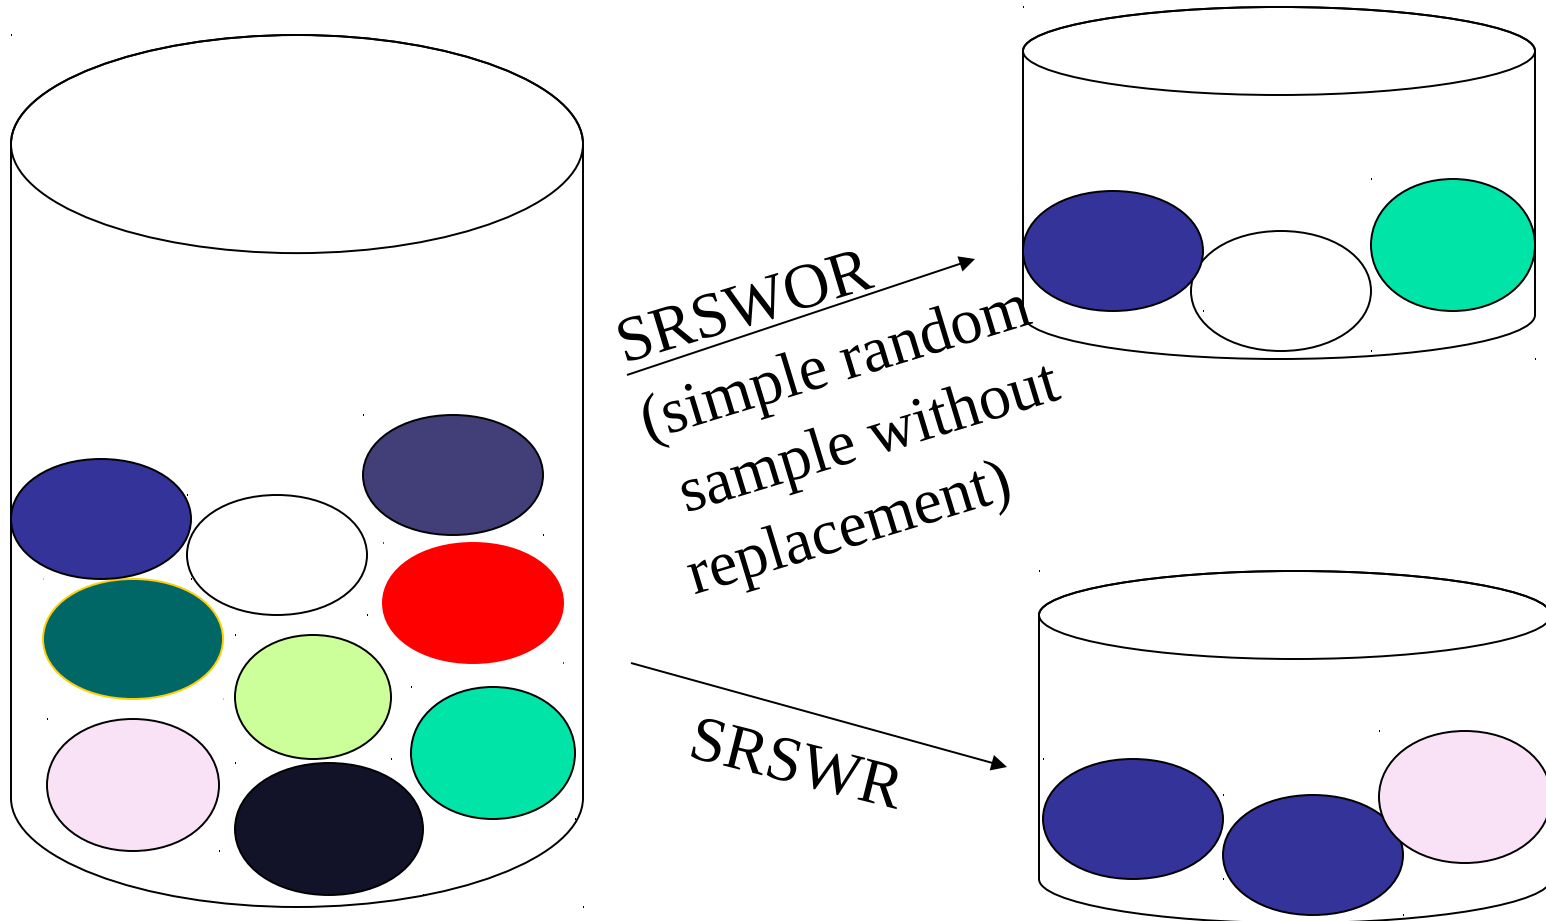


Raw Data

Sampling: Cluster or Stratified Sampling

Raw Data

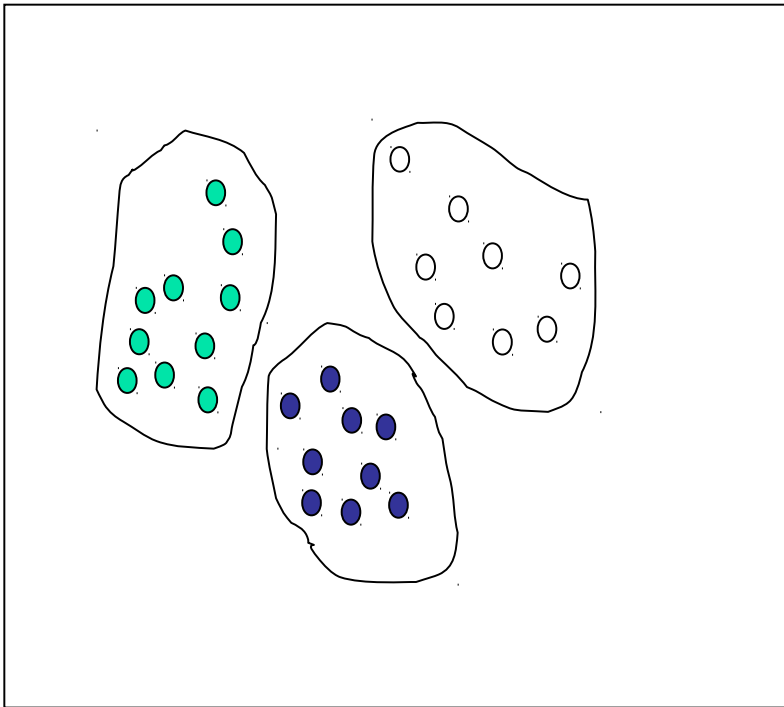

Cluster/Stratified Sample

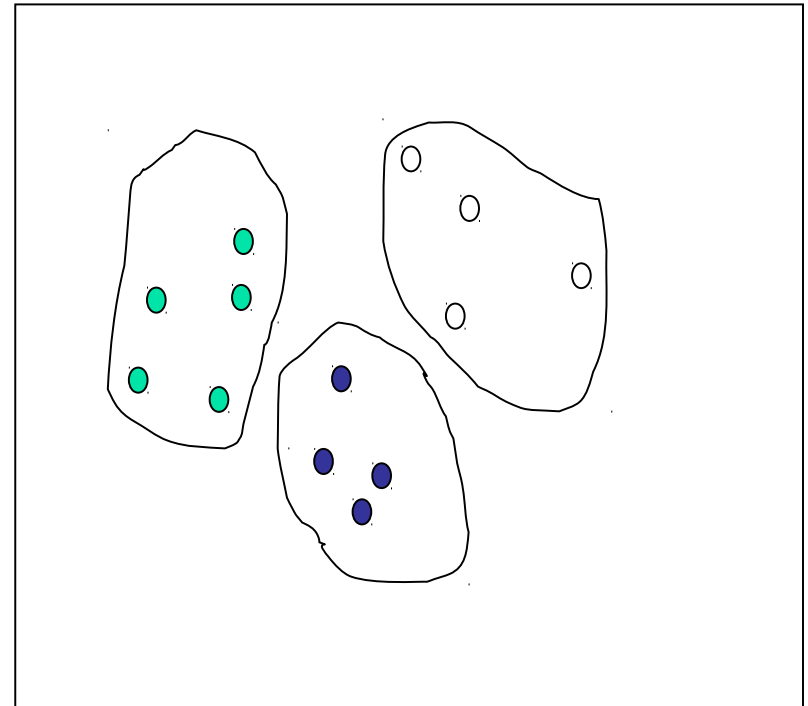

Discretization

- Three types of attributes:
 - Nominal — values from an unordered set, e.g., color, profession
 - Ordinal — values from an ordered set, e.g., military or academic rank
 - Continuous — real numbers, e.g., integer or real numbers
- Discretization:
 - Divide the range of a continuous attribute into intervals
 - Some classification algorithms only accept categorical attributes.
 - Reduce data size by discretization
 - Prepare for further analysis

Discretization and Concept Hierarchy Generation for Numeric Data

- Typical methods: All the methods can be applied recursively
 - Binning (covered above)
 - Top-down split, unsupervised,
 - Histogram analysis (covered above)
 - Top-down split, unsupervised
 - Clustering analysis (covered above)
 - Either top-down split or bottom-up merge, unsupervised
 - Entropy-based discretization: supervised, top-down split
 - Interval merging by χ^2 Analysis: unsupervised, bottom-up merge
 - Segmentation by natural partitioning: top-down split, unsupervised

Entropy-Based Discretization

- Given a set of samples S , if S is partitioned into two intervals S_1 and S_2 using boundary T , the information gain after partitioning is

$$I(S, T) = \frac{|S_1|}{|S|} \text{Entropy}(S_1) + \frac{|S_2|}{|S|} \text{Entropy}(S_2)$$

- Entropy is calculated based on class distribution of the samples in the set. Given m classes, the entropy of S_1 is

$$\text{Entropy}(S_1) = - \sum_{i=1}^m p_i \log_2(p_i)$$

where p_i is the probability of class i in S_1

- The boundary that minimizes the entropy function over all possible boundaries is selected as a binary discretization
- The process is recursively applied to partitions obtained until some stopping criterion is met
- Such a boundary may reduce data size and improve classification

Interval Merge by χ^2 Analysis

- Merging-based (bottom-up) vs. splitting-based methods
- Merge: Find the best neighboring intervals and merge them to form larger intervals recursively
- ChiMerge [Kerber AAAI 1992, See also Liu et al. DMKD 2002]
 - Initially, each distinct value of a numerical attr. A is considered to be one interval
 - χ^2 tests are performed for every pair of adjacent intervals
 - Adjacent intervals with the least χ^2 values are merged together, since low χ^2 values for a pair indicate similar class distributions
 - This merge process proceeds recursively until a predefined stopping criterion is met (such as significance level, max-interval, max inconsistency, etc.)

Segmentation by Natural Partitioning

- A simple 3-4-5 rule can be used to segment numeric data into relatively uniform, “natural” intervals.
 - If an interval covers 3, 6, 7 or 9 distinct values at the most significant digit, partition the range into 3 equi-width intervals
 - If it covers 2, 4, or 8 distinct values at the most significant digit, partition the range into 4 intervals
 - If it covers 1, 5, or 10 distinct values at the most significant digit, partition the range into 5 intervals

Automatic Concept Hierarchy Generation

- Some hierarchies can be automatically generated based on the analysis of the number of distinct values per attribute in the data set
 - The attribute with the most distinct values is placed at the lowest level of the hierarchy
 - Exceptions, e.g., weekday, month, quarter, year



CM - Séance 2 – Partie B

Entrepôts de données et OLAP

What is Data Warehouse?

- Defined in many different ways, but not rigorously.
 - A decision support database that is maintained **separately** from the organization's operational database
 - Support **information processing** by providing a solid platform of consolidated, historical data for analysis.
- “A data warehouse is a subject-oriented, integrated, time-variant, and nonvolatile collection of data in support of management's decision-making process.”—W. H. Inmon
- Data warehousing:
 - The process of constructing and using data warehouses

Data Warehouse—Subject-Oriented

- Organized around major subjects, such as **customer, product, sales**
- Focusing on the modeling and analysis of data for decision makers, not on daily operations or transaction processing
- Provide **a simple and concise** view around particular subject issues by **excluding data that are not useful in the decision support process**

Data Warehouse—Integrated

- Constructed by integrating multiple, heterogeneous data sources
 - relational databases, flat files, on-line transaction records
- Data cleaning and data integration techniques are applied.
 - Ensure consistency in naming conventions, encoding structures, attribute measures, etc. among different data sources
 - E.g., Hotel price: currency, tax, breakfast covered, etc.
 - When data is moved to the warehouse, it is

Data Warehouse—Time Variant

- The time horizon for the data warehouse is significantly longer than that of operational systems
 - Operational database: current value data
 - Data warehouse data: provide information from a historical perspective (e.g., past 5-10 years)
- Every key structure in the data warehouse
 - Contains an element of time, explicitly or implicitly
 - But the key of operational data may or may not contain “time element”

Data Warehouse—Nonvolatile

- A **physically separate store** of data transformed from the operational environment
- Operational **update of data does not occur** in the data warehouse environment
 - Does not require transaction processing, recovery, and concurrency control mechanisms
 - Requires only two operations in data accessing:
 - *initial loading of data* and *access of data*

Data Warehouse vs. Heterogeneous DBMS

- Traditional heterogeneous DB integration: A **query driven** approach
 - Build **wrappers/mediators** on top of heterogeneous databases
 - When a query is posed to a client site, a meta-dictionary is used to translate the query into queries appropriate for individual heterogeneous sites involved, and the results are integrated into a global answer set
 - Complex information filtering, compete for resources
- **Data warehouse: update-driven**, high performance
 - Information from heterogeneous sources is integrated in advance and stored in warehouses for direct query and analysis

Data Warehouse vs. Operational DBMS

- OLTP (on-line transaction processing)
 - Major task of traditional relational DBMS
 - Day-to-day operations: purchasing, inventory, banking, manufacturing, payroll, registration, accounting, etc.
- OLAP (on-line analytical processing)
 - Major task of data warehouse system
 - Data analysis and decision making
- Distinct features (OLTP vs. OLAP):
 - User and system orientation: customer vs. market
 - Data contents: current, detailed vs. historical, consolidated
 - Database design: ER + application vs. star + subject
 - View: current, local vs. evolutionary, integrated
 - Access patterns: update vs. read-only but complex queries

OLTP vs. OLAP

	OLTP	OLAP
users	clerk, IT professional	knowledge worker
function	day to day operations	decision support
DB design	application-oriented	subject-oriented
data	current, up-to-date detailed, flat relational isolated	historical, summarized, multidimensional integrated, consolidated
usage	repetitive	ad-hoc
access	read/write index/hash on prim. key	lots of scans
unit of work	short, simple transaction	complex query
# records accessed	tens	millions
#users	thousands	hundreds
DB size	100MB-GB	100GB-TB
metric	transaction throughput	query throughput, response


Why Separate Data Warehouse?

- High performance for both systems
 - DBMS— tuned for OLTP: access methods, indexing, concurrency control, recovery
 - Warehouse—tuned for OLAP: complex OLAP queries, multidimensional view, consolidation
- Different functions and different data:
 - missing data: Decision support requires historical data which operational DBs do not typically maintain
 - data consolidation: DS requires consolidation (aggregation, summarization) of data from heterogeneous sources
 - data quality: different sources typically use inconsistent data representations, codes and formats which have to be reconciled
- Note: There are more and more systems which perform OLAP analysis directly on relational databases

From Tables and Spreadsheets to Data Cubes

- A data warehouse is based on a **multidimensional data model** which views data in the form of a data cube
- A data cube, such as **sales**, allows data to be modeled and viewed in multiple dimensions
 - Dimension tables, such as **item (item_name, brand, type)**, or **time(day, week, month, quarter, year)**
 - Fact table contains measures (such as **dollars_sold**) and keys to each of the related dimension tables
- In data warehousing literature, an n-D base cube is called a **base cuboid**. The top most 0-D cuboid, which holds the highest-level of summarization, is called the **apex cuboid**. The lattice of cuboids forms a **data cube**.


Cube: A Lattice of Cuboids

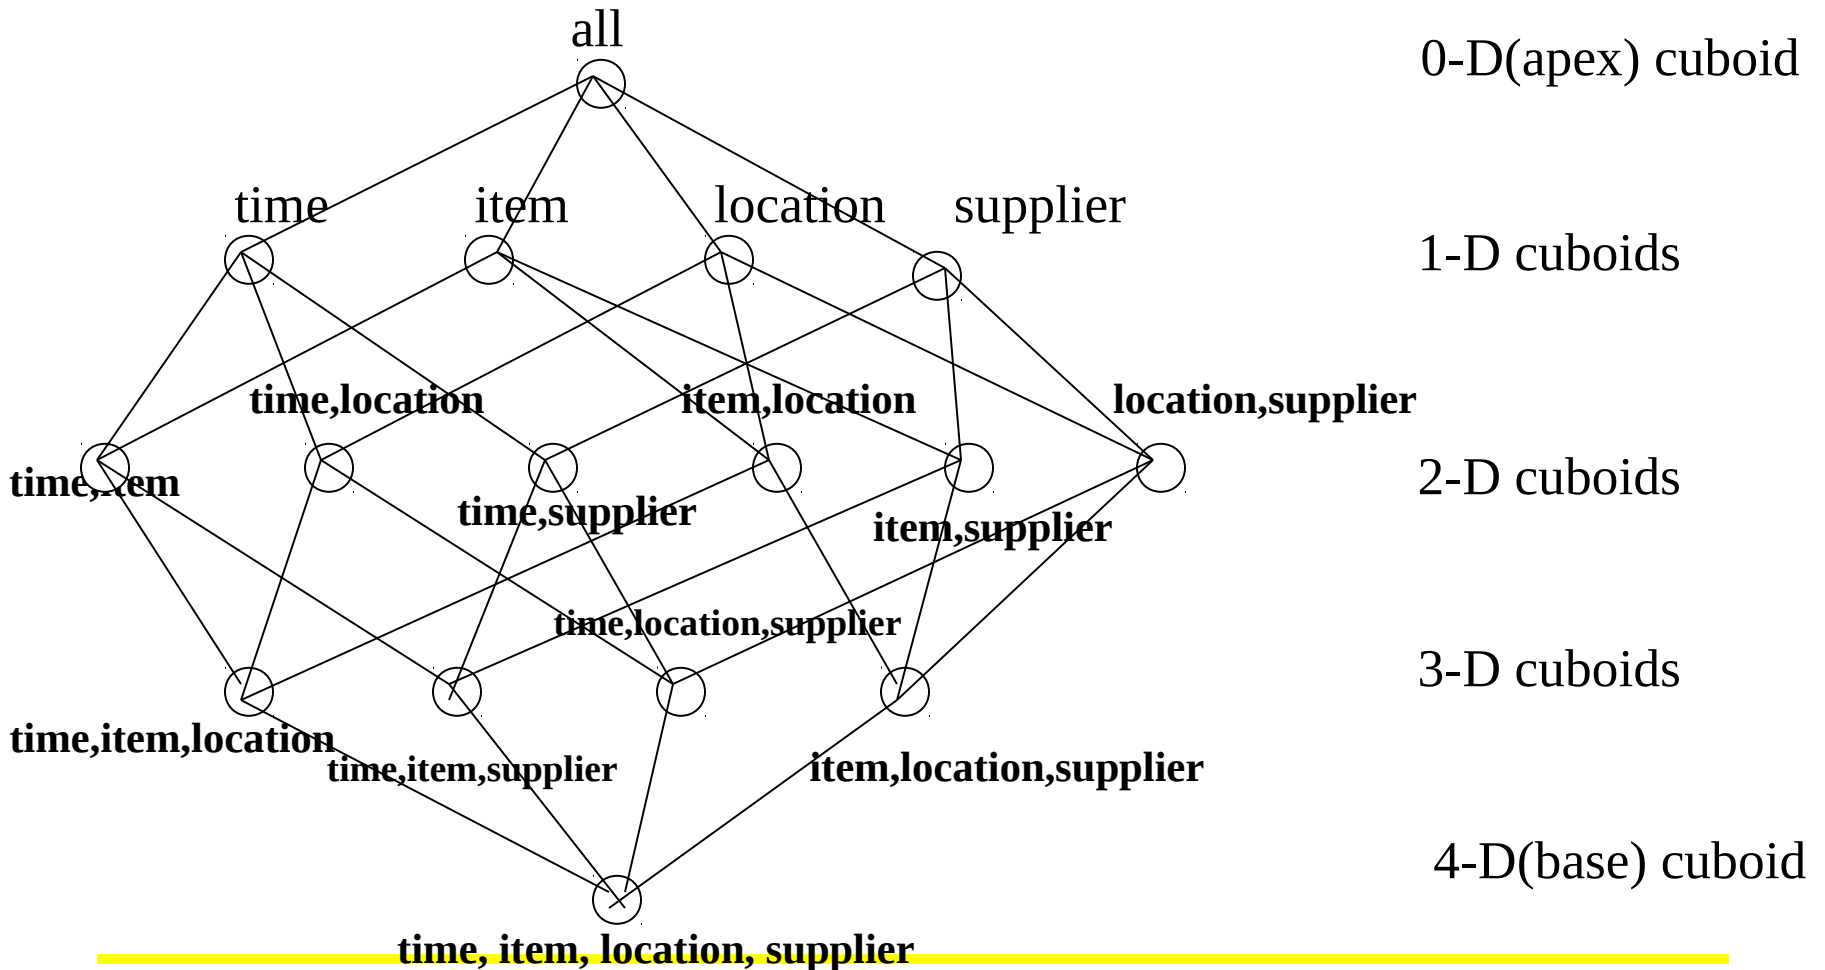


Conceptual Modeling of Data Warehouses

- Modeling data warehouses: dimensions & measures
 - Star schema: A fact table in the middle connected to a set of dimension tables
 - Snowflake schema: A refinement of star schema where some dimensional hierarchy is **normalized** into a set of smaller dimension tables, forming a shape similar to snowflake
 - Fact constellations: Multiple fact tables share dimension tables, viewed as a collection of stars, therefore called **galaxy schema** or fact constellation


Example of Star Schema

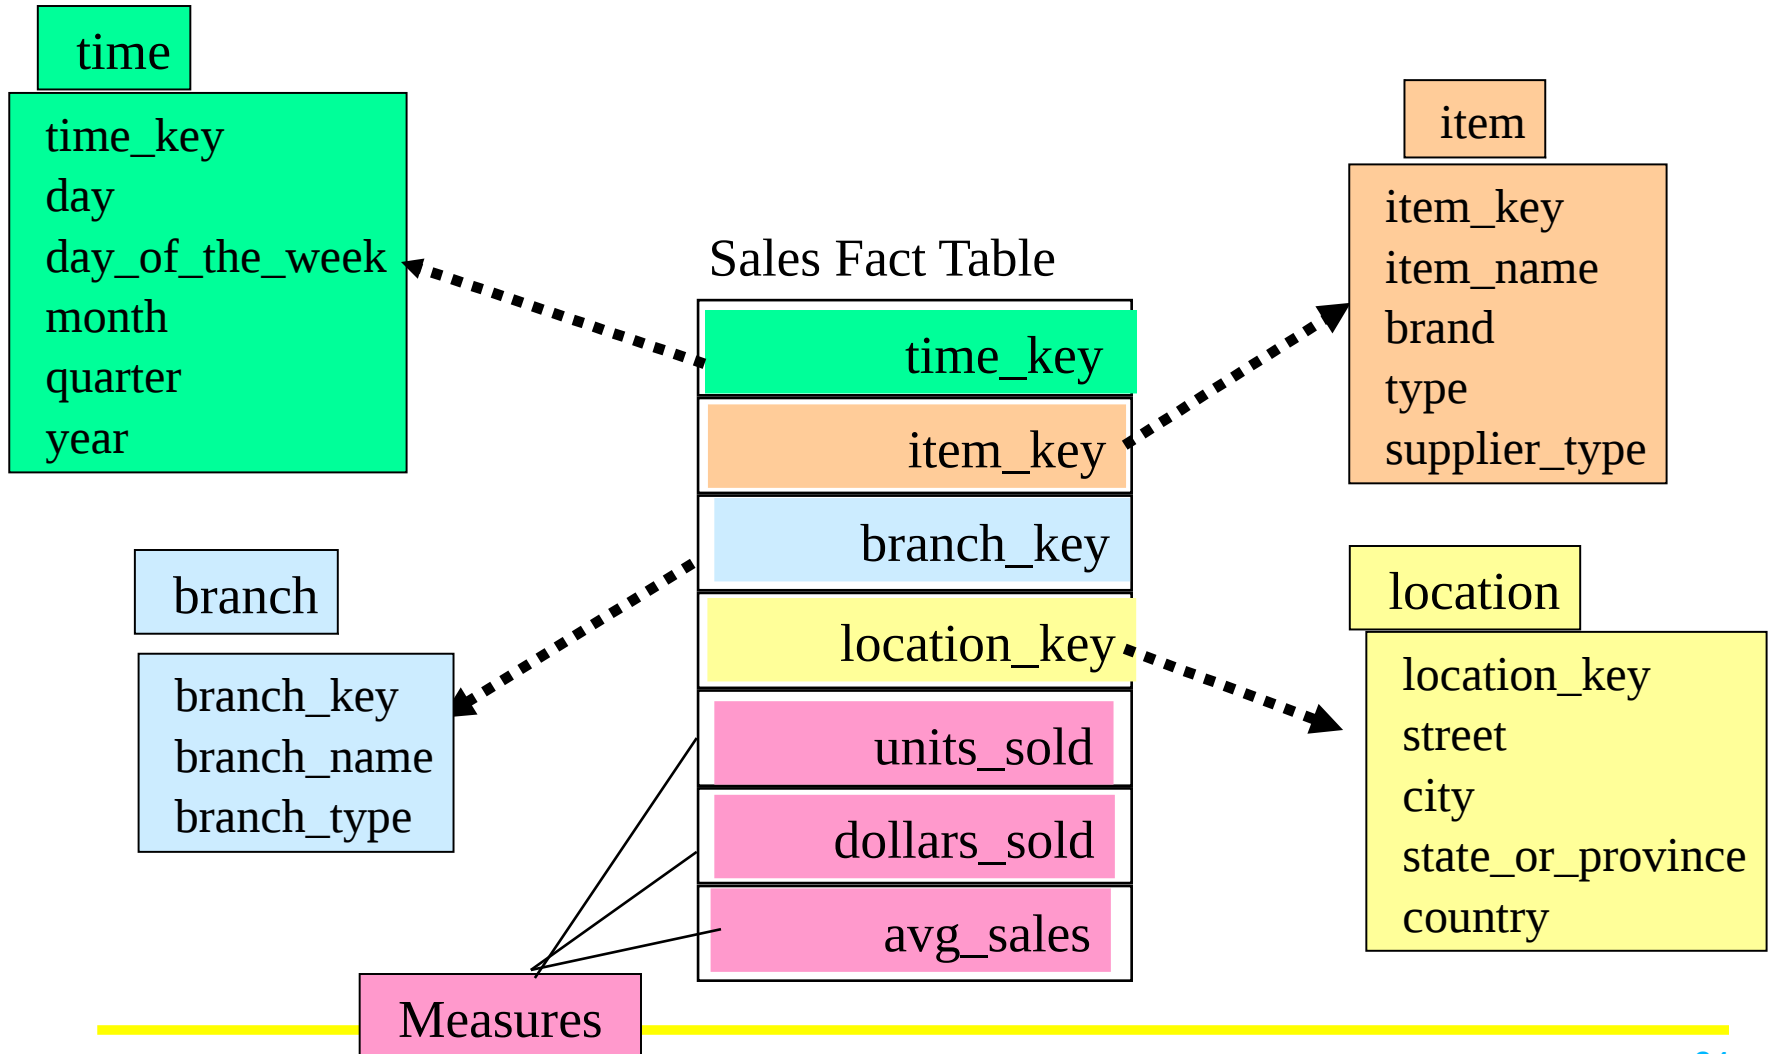

Example of Snowflake Schema

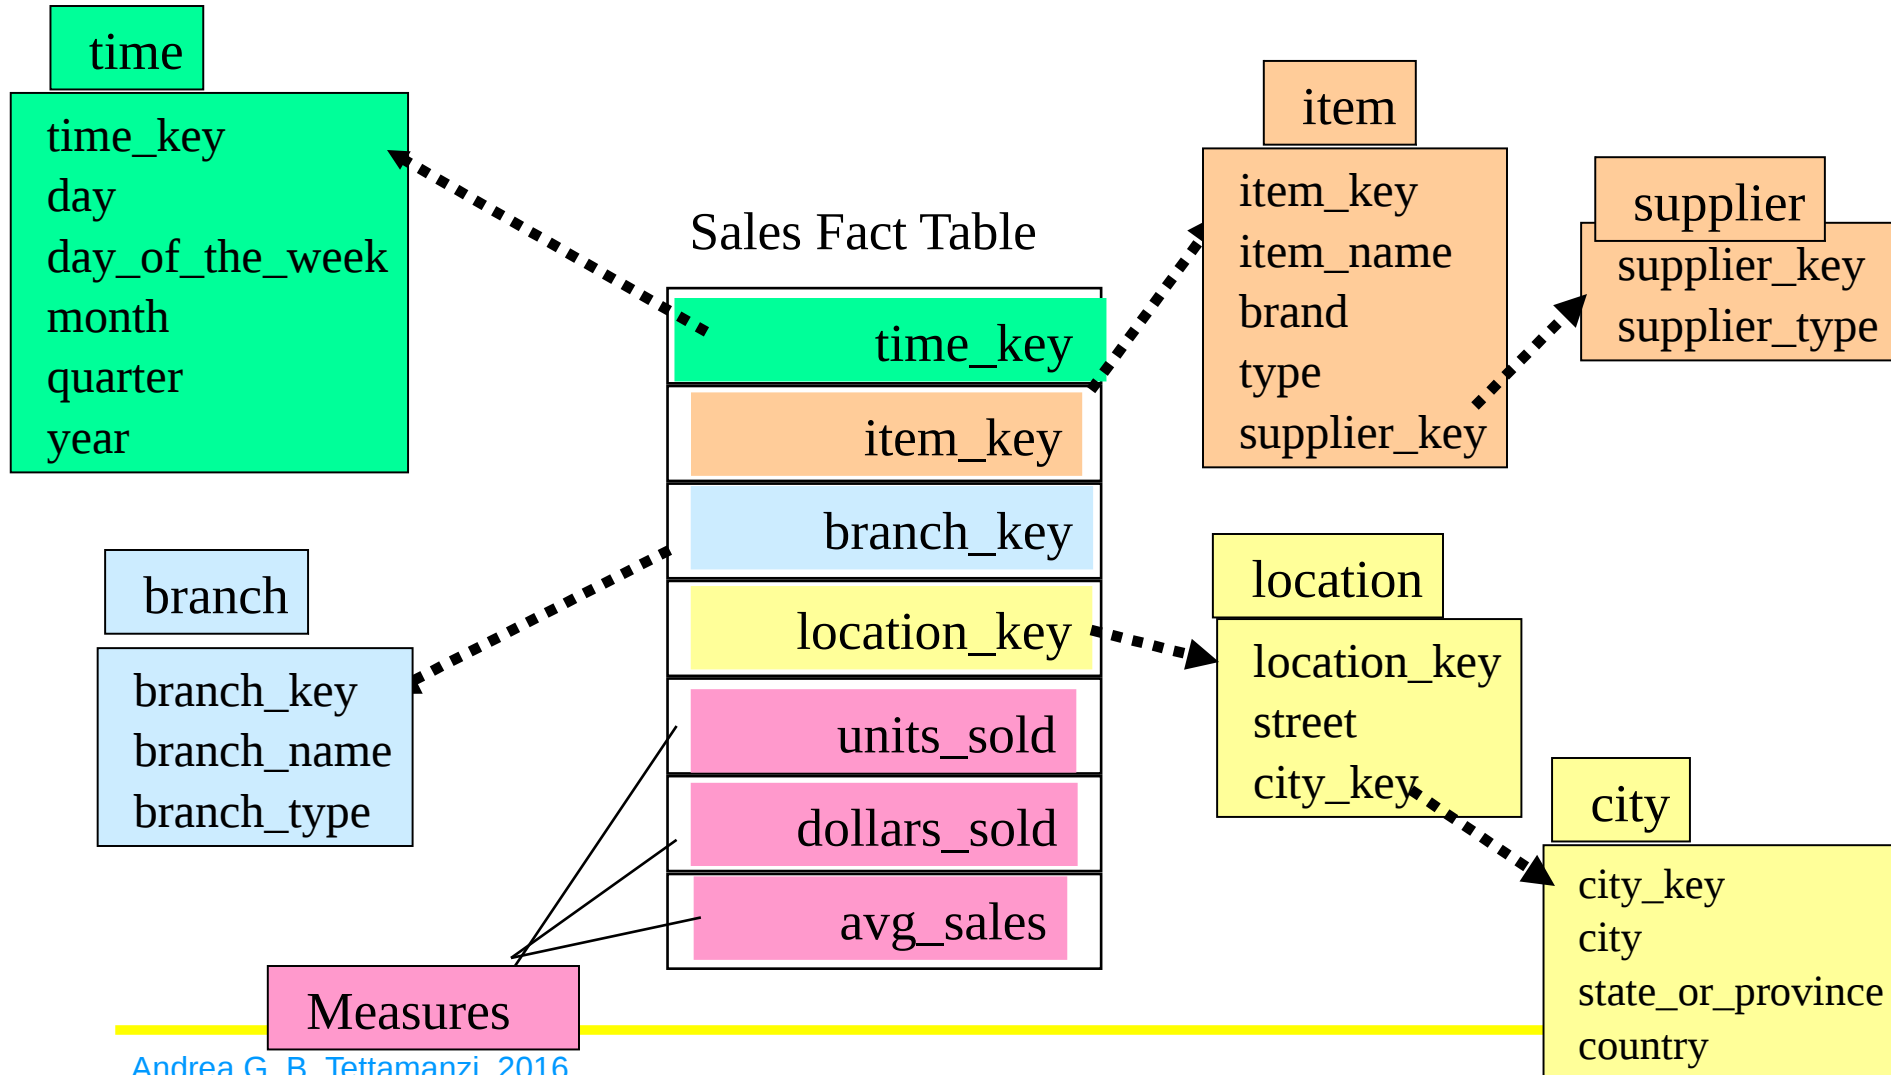


Example of Fact Constellation

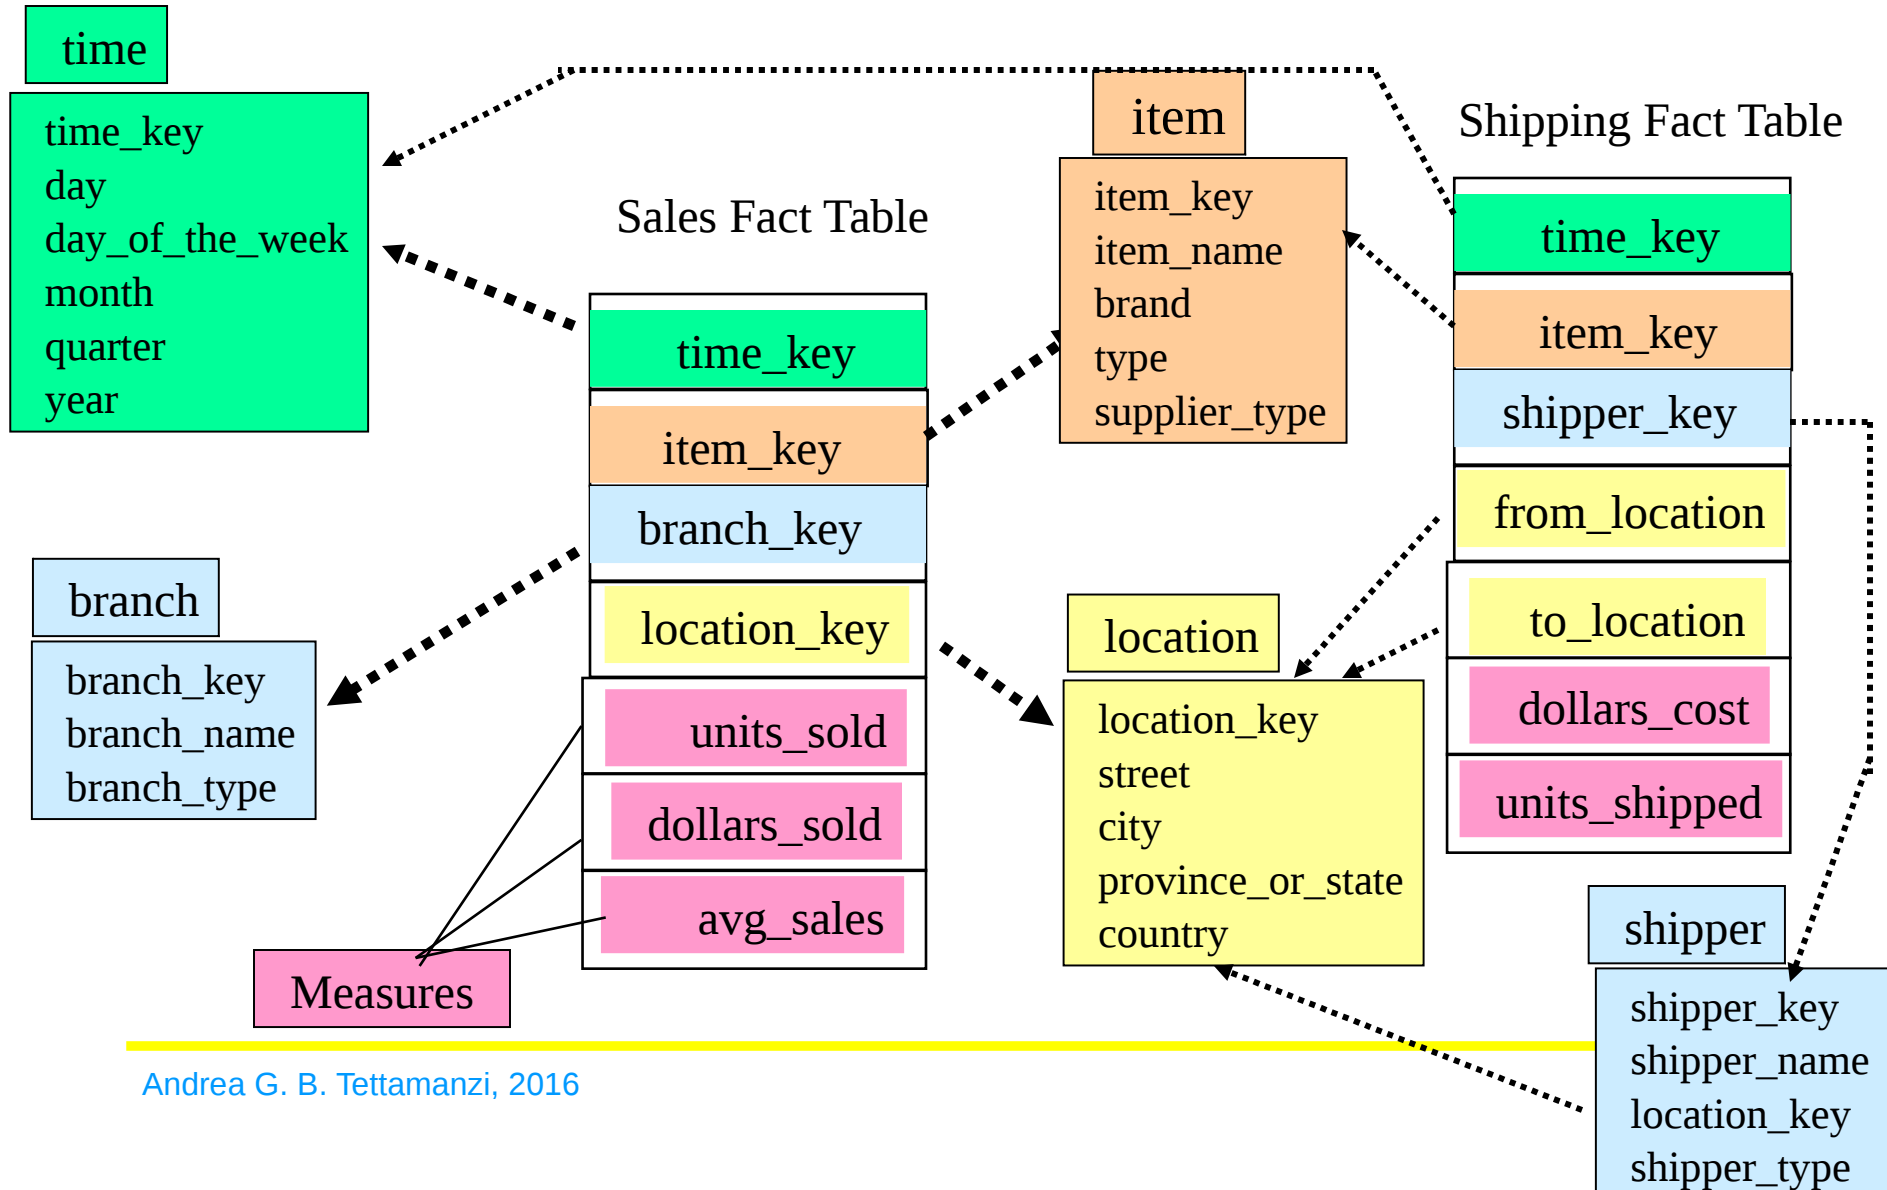

Measures of Data Cube: Three Categories


- **Distributive**: if the result derived by applying the function to n aggregate values is the same as that derived by applying the function on all the data without partitioning
 - E.g., `count()`, `sum()`, `min()`, `max()`
- **Algebraic**: if it can be computed by an algebraic function with M arguments (where M is a bounded integer), each of which is obtained by applying a distributive aggregate function
 - E.g., `avg()`, `min_N()`, `standard_deviation()`
- **Holistic**: if there is no constant bound on the storage size needed to describe a subaggregate.
 - E.g., `median()`, `mode()`, `rank()`

A Concept Hierarchy: Dimension (location)

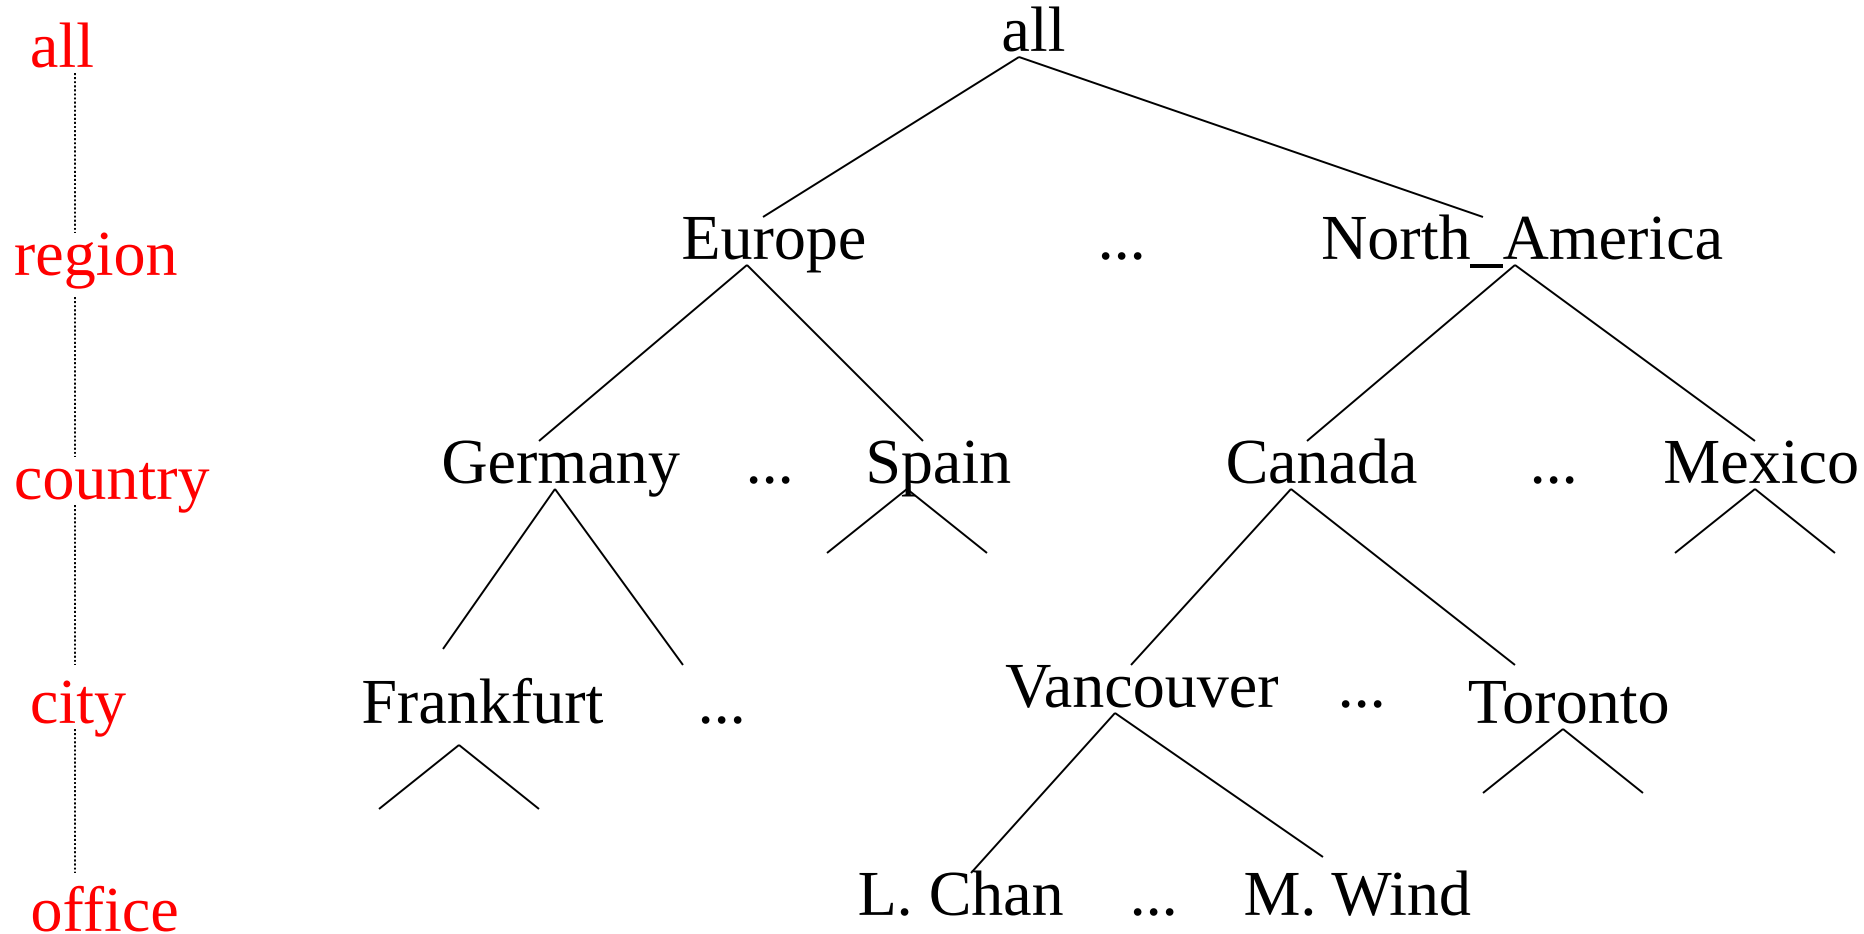


Multidimensional Data


- Sales volume as a function of product, month, and region

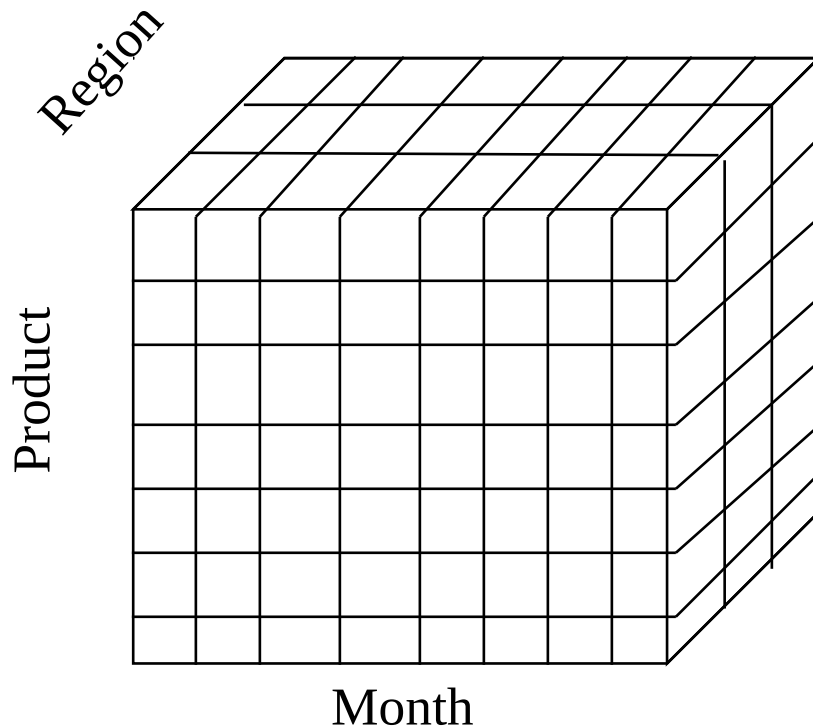


Dimensions: Product, Location, Time
Hierarchical summarization paths

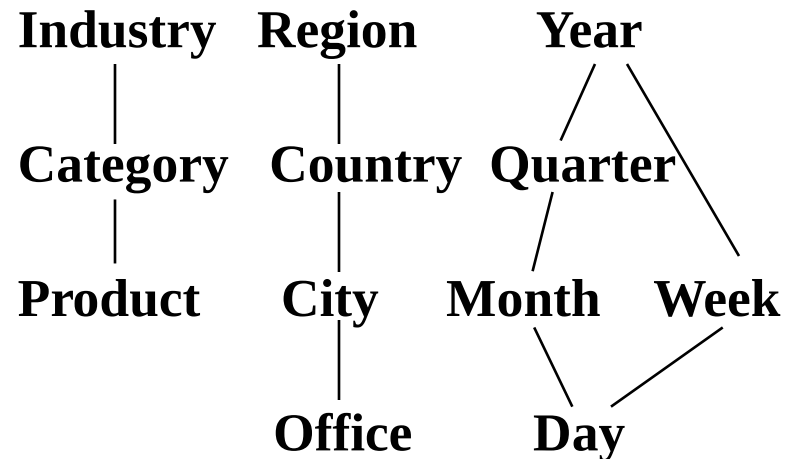

A Sample Data Cube

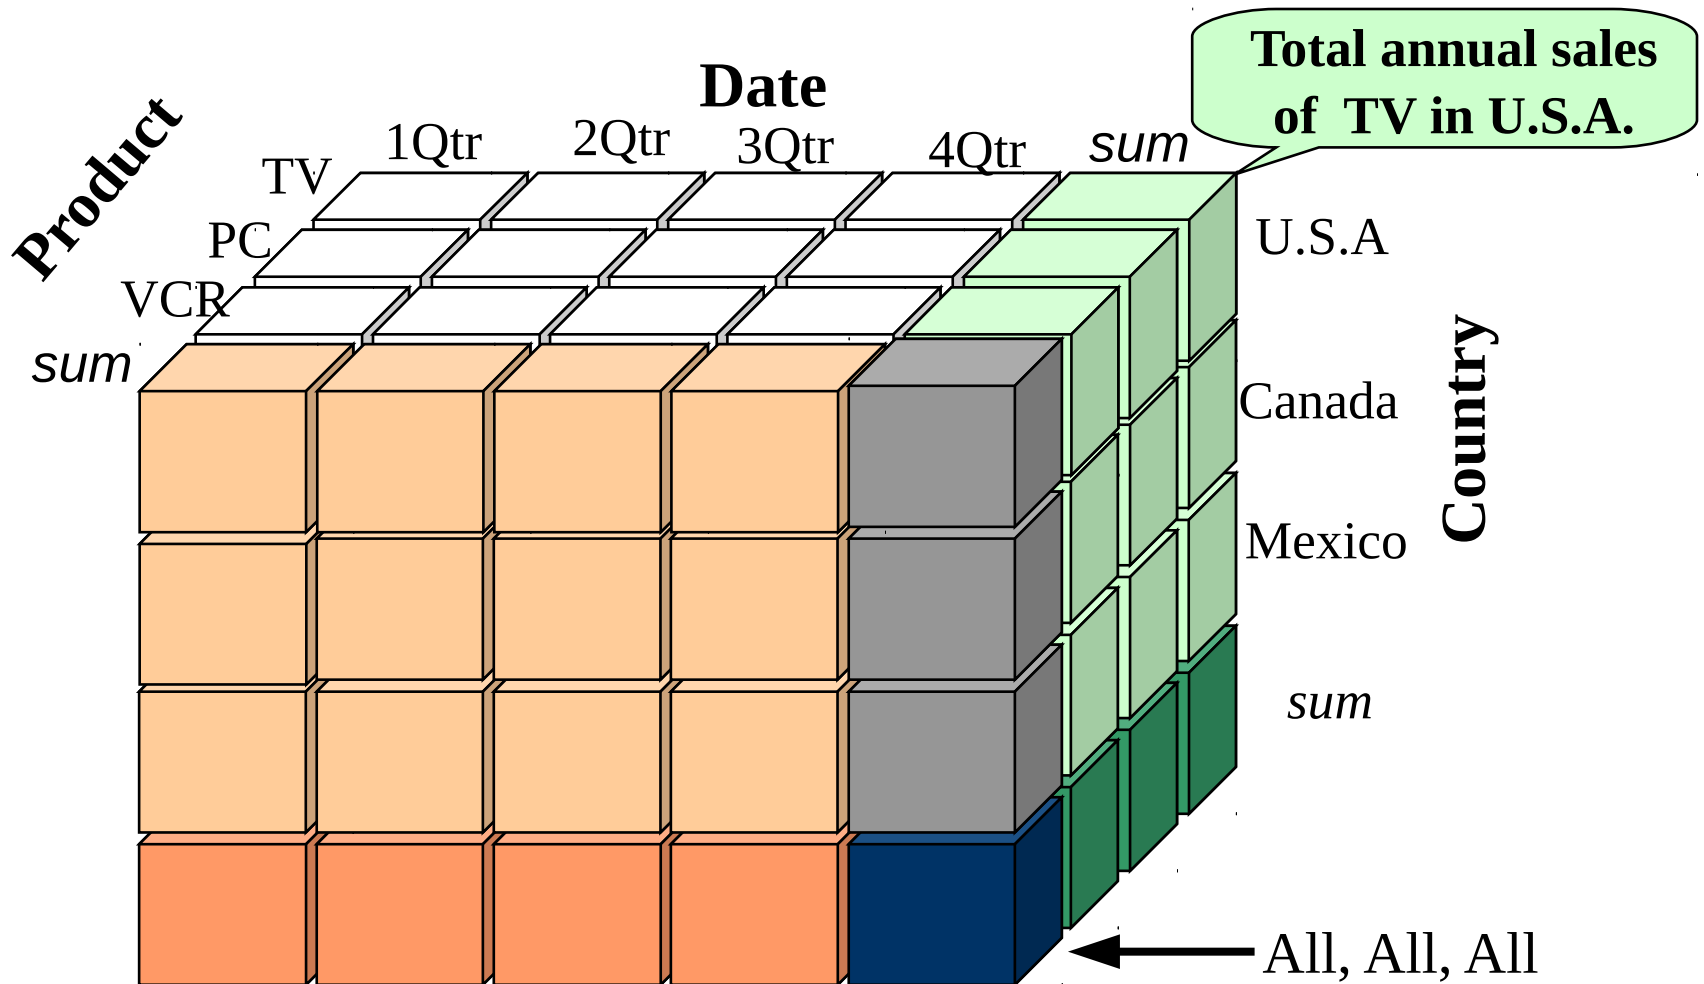

Cuboids Corresponding to the Cube

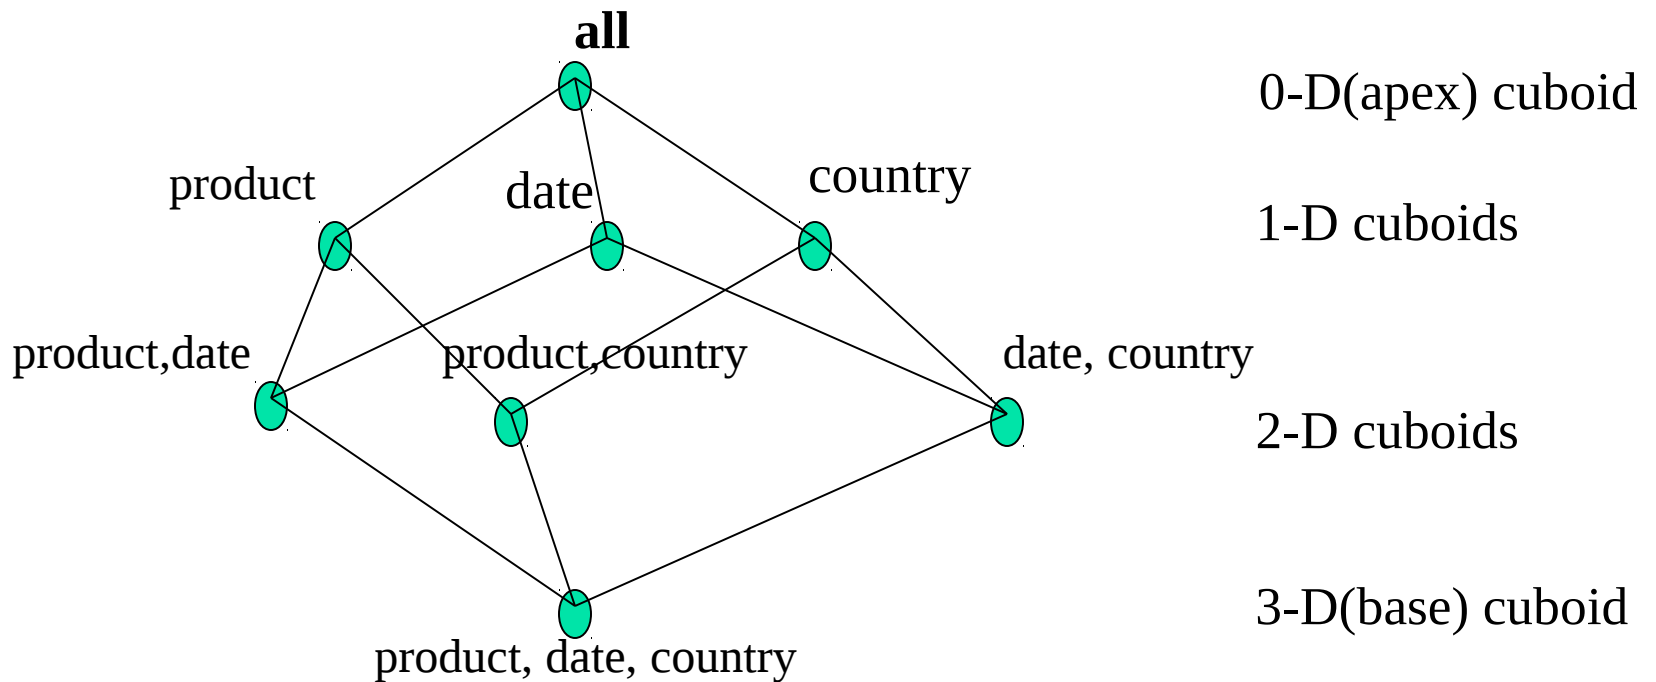

Typical OLAP Operations

- **Roll up (drill-up):** summarize data
 - *by climbing up hierarchy or by dimension reduction*
- **Drill down (roll down):** reverse of roll-up
 - *from higher level summary to lower level summary or detailed data, or introducing new dimensions*
- **Slice and dice:** *project and select*
- **Pivot (rotate):**
 - *reorient the cube, visualization, 3D to series of 2D planes*
- Other operations
 - **drill across:** *involving (across) more than one fact table*
 - **drill through:** *through the bottom level of the cube to its back-end relational tables (using SQL)*

Merci de votre attention

